


Glass Make-up Walkable Yes Non-Walkable Glazing: 10mm top layer - Low Iron Tempered NanoDot 1.52mm interlayer PVB 10mm middle layer - Low Iron Tempered 1.52mm interlayer PVB 10mm bottom layer - Low Iron Tempered EXPEDITED Patent #'s US 9,874,018 US 9,909,309 US 9,920,532 US 9,797,140 US 9,777,531 US 9,598,867 US 9,441,378 GLASS FLOORING SYSTEMS INC		21280 Avalon Dr, Rocky River, OH 44116		Frame Components Perimeter Frame Type Pedestal Thermally Broken Recessed Thermally Broken Recessed Interior - Modified Econo Frame® SkyDeck None- Glass only 2.0 Pedestal 2.0 Recessed Custom Cross Beam Type I Beam TB I Beam NTB T Section TB T Section NTB Econo Frame® Flat I Beam TB 2.0 Frame Finish Paint Cap Color Black White Custom Frame Color Black White Custom Glass Top Layer Insulated Glass Back Paint Color Back Paint NanoDot No Yes Black Frame Assembly Configuration Fully Assembled with Glass bonded to Frame Frame Assembled- No Glass Installed Knock Down Kit Clipped / Welded Rev. No. Date Description 1 2 3 4 Specifications Frame: ARCHITECT N/A CONTRACTOR Ross Builders Co., Inc. MANUFACTURER Glass Flooring Systems, Inc. 6 Aaron Way Unit 1 Sparta, NJ 07871 PROJECT 21280 Avalon Dr Replacement Panel ALL ELEVATIONS ARE VIEWED FROM EXTERIOR DRAWN DATE C-100 SHEET JH 10/27/25 1 of 3	
		General Notes A. These drawings are the sole property of Glass Flooring Systems, Inc. and may not be used or duplicated without written consent from Glass Flooring Systems, Inc.Glass Flooring Systems, Inc. assumes no responsibility for work and or errors incurred by other trades through the use of these drawings. B. Shop drawings, notations and all shown dimensions must be approved by the purchasing party of the product in order for Glass Flooring Systems, Inc. to proceed with the material fabrication. Approval by the Architect and / or General Contractor alone shall not compromise " Approved" drawings and hence, fabrication of materials shall be deferred until above approval is satisfied. Glass Flooring Systems, Inc. will not assume any responsibility, liability or burden due to delay of schedule. C. All items marked "by others" are not supplied by Glass Flooring Systems, Inc. and are shown for coordination and informational purposes only. D. Perimeter anchors, shims, backer rod, finish sealants and installation are the responsibility of the installer.Glass Flooring Systems, Inc.shall not accept any responsibility for such materials. E. All materials provided by others trades to which Glass Flooring Systems, Inc.products scope of work is to be anchored, must be of adequate structural strength and integrity to support all imposed weights, reactions and attachment of the system under maximum design loads. F. Glass Flooring Systems products are not fire rated. G. These shop drawings are not approved until frame color and anti-slip texture are selected. H. Standard spacing between glass panels and between glass panels and frame are ¾" I. If Applicable, field waterproofing is the sole responsibility of the purchaser. Glass Flooring Systems, Inc. recommends a liquid applied waterproofing. Field waterproofing must go above and beyond the thermally break and end no less than ½" from the top cap. our warranty does not cover field waterproofing of any kind. J. For thermally broken units insulation must be installed tight against frame and up to thermal break as shown in shop drawings. K. Glass Flooring Systems, Inc. will provide testing data and information on our offered anti-slip textures however final decision and determination of suitability is the sole responsibility of the purchaser. L. For Exterior units provide 1/8" pitch per foot when installing unit. Pitch is not built into unit. M. Due to the production processes required in the manufacture of our (Kiln / Cast) Seeded Organic® anti-slip texture, the product may develop some minor imperfections such as some slight distortion or small bubbles within the make-up of the laminated assembly. These will not affect the structural integrity of the glass panel nor shall they be considered a defect. N. LED LIGHTS - No Warranty of any type is included with these lights. Product will be tested and video taped prior to shipment. Electrical Connection on site by others.		Signature Required Initial Here These shop drawings are approved for fabrication as submitted without further comment. Date: Approval Note Signed: When stamped "Approved" by the buyer these shop drawings shall be deemed a correct and accurate interpretation of work scope and project requirements for Glass flooring Systems, Inc. Such approval shall constitute buyer's final acceptance and authorization to proceed with fabrication and supply of all materials identified herein and as agreed to in the signed order confirmation's terms and conditions. Title: Company:	



1 PLAN - GLASS UNIT A GL-2 - QTY 1
Scale: 3"=1'-0"

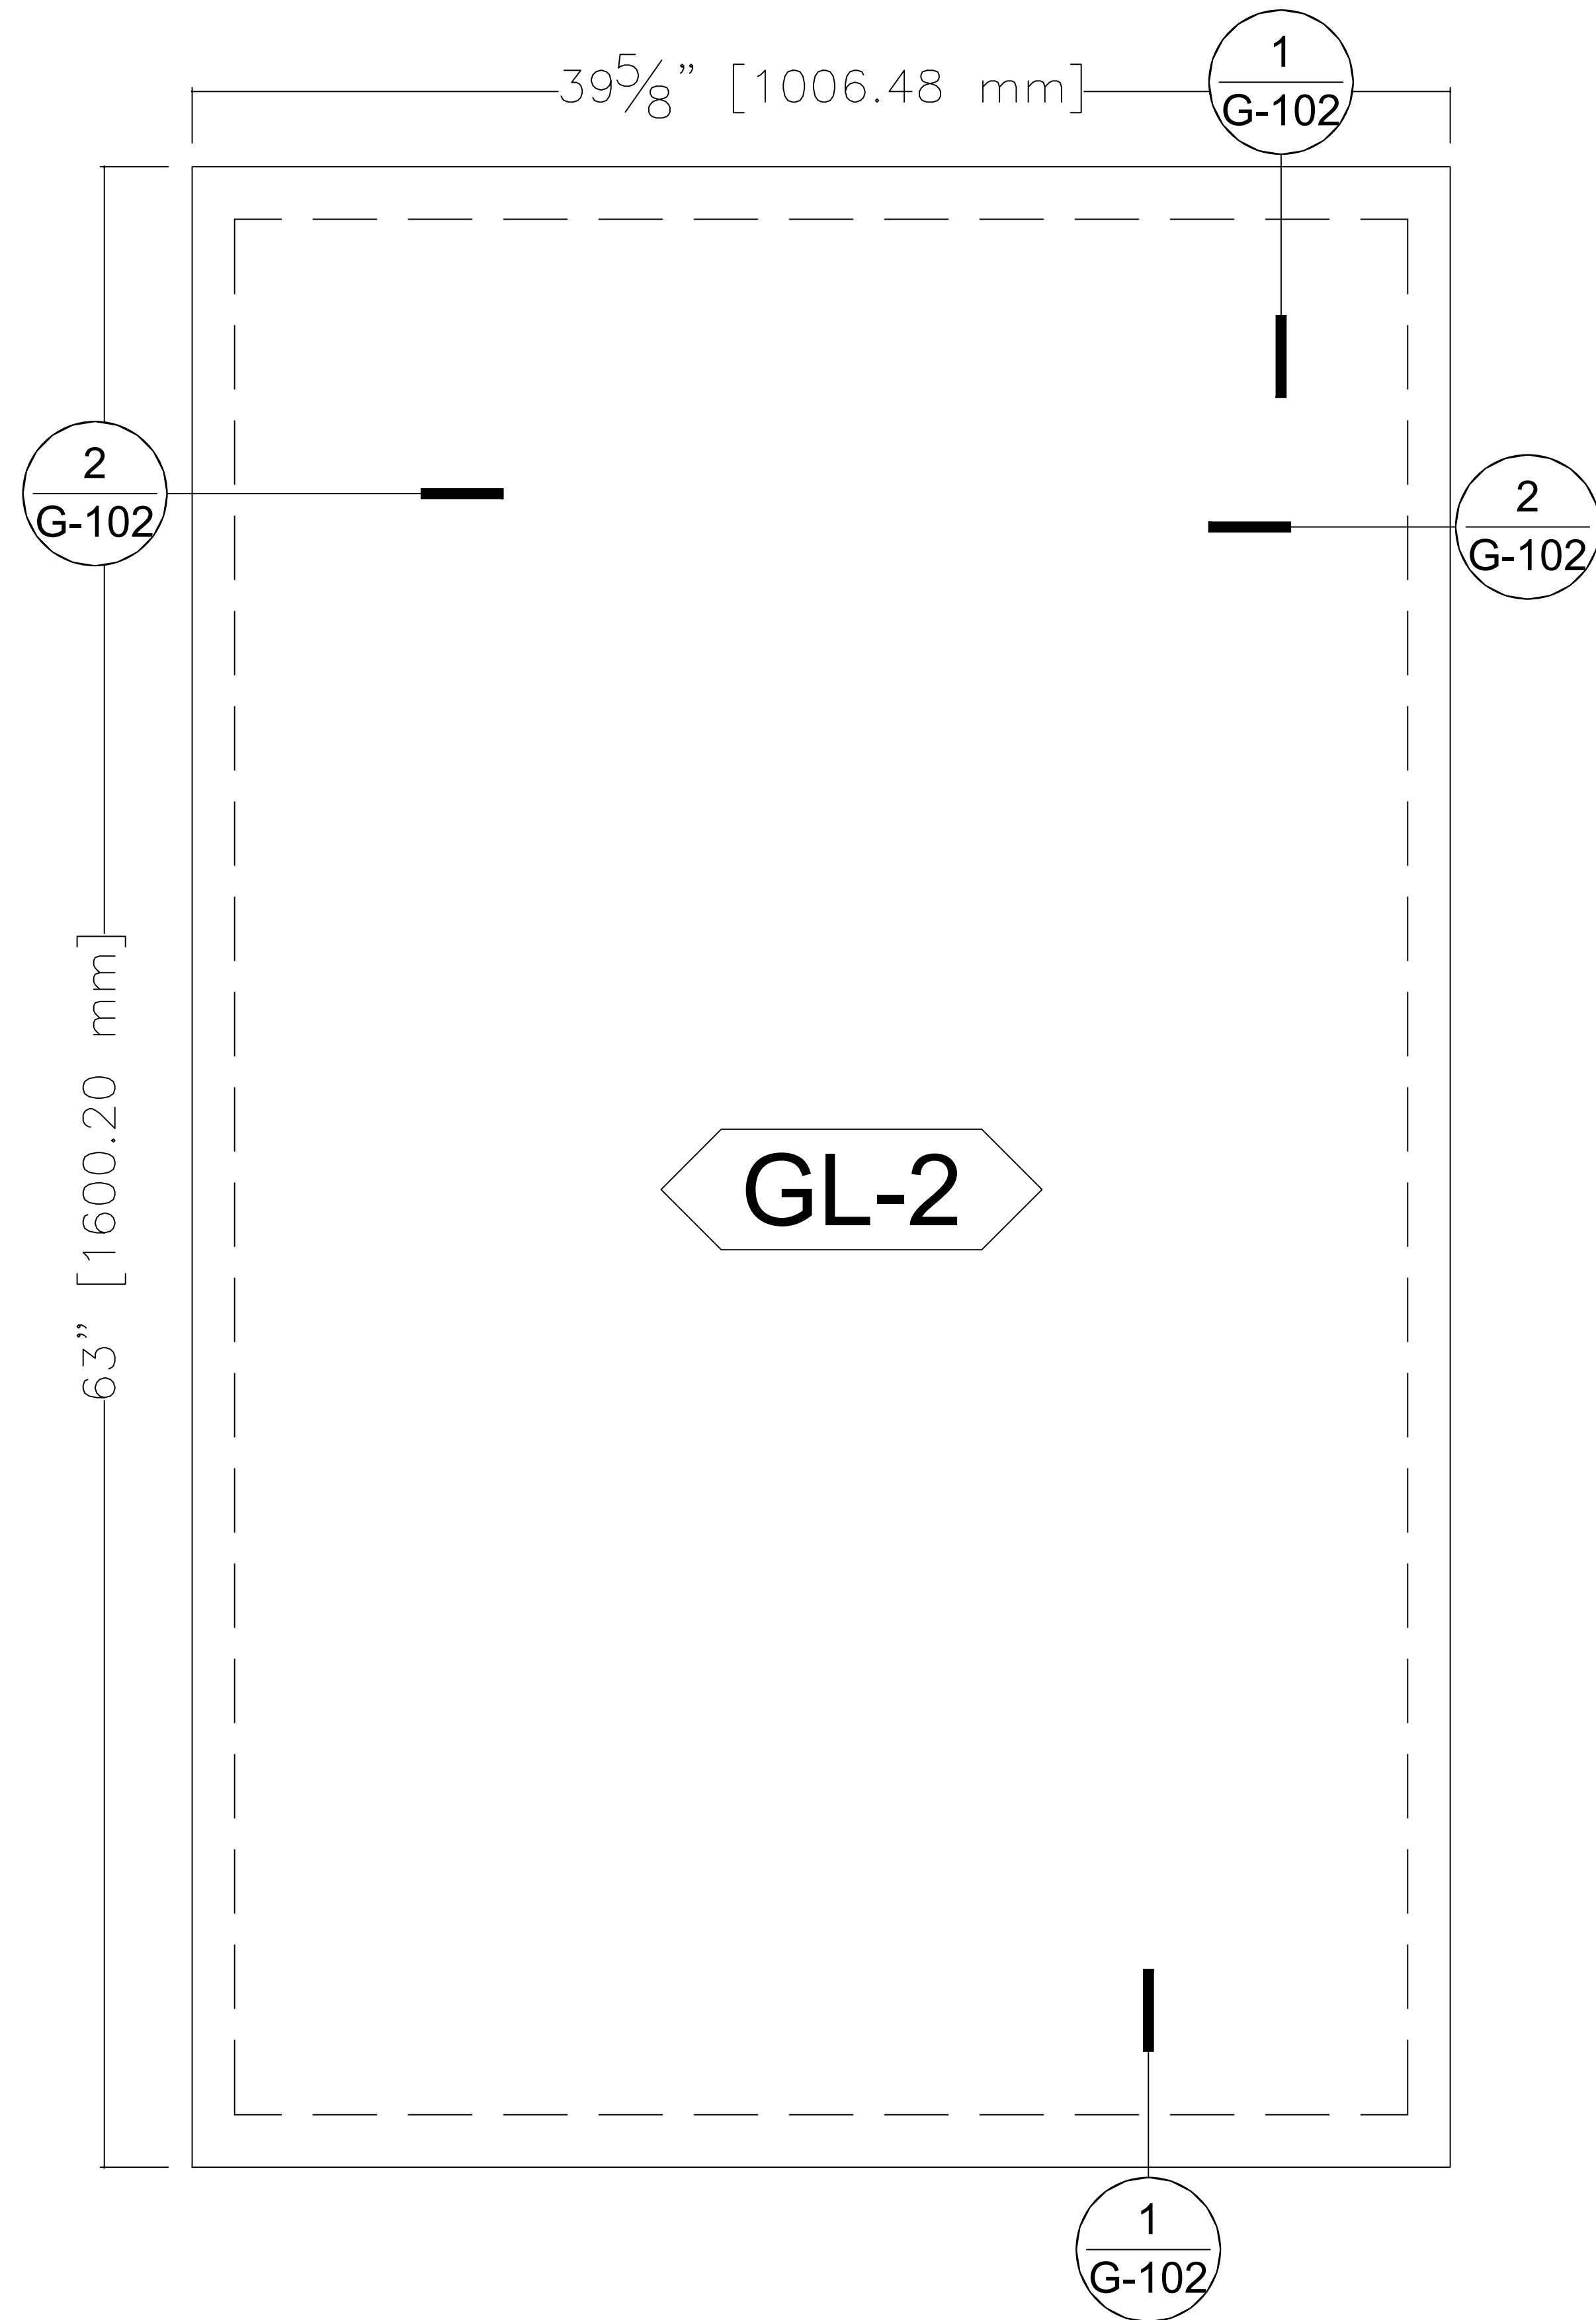


Signed: _____
Date: _____

Rev.	No.	Date	Description
1			
2			
3			
4			


Specifications	
Frame:	

ARCHITECT		N/A	
CONTRACTOR		Ross Builders Co., Inc.	
MANUFACTURER		Glass Flooring Systems, Inc. 6 Aaron Way Unit 1 Sparta, NJ 07871	
PROJECT		21280 Avalon Dr Replacement Panel	
ALL ELEVATIONS ARE VIEWED FROM EXTERIOR			
DRAWN	DATE	G-101	SHEET
JH	10/27/25		2 of 3

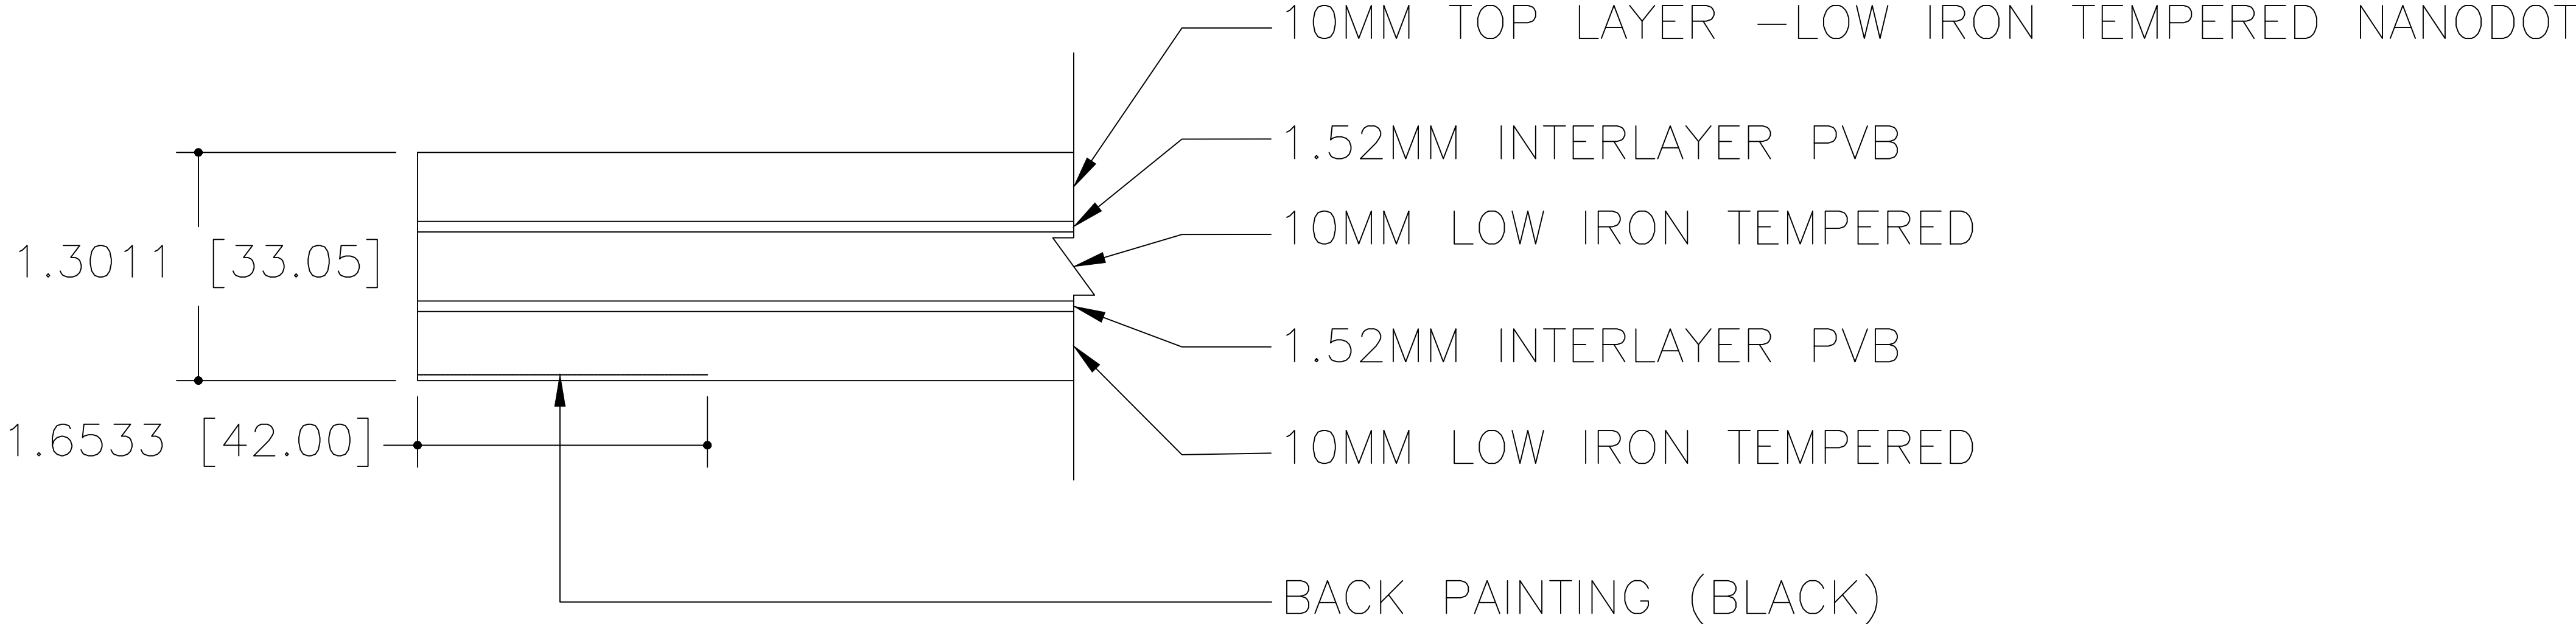

1 DETAIL - PERIMETER GLASS ASSEMBLY

Scale: 1'-6"=1'-0"

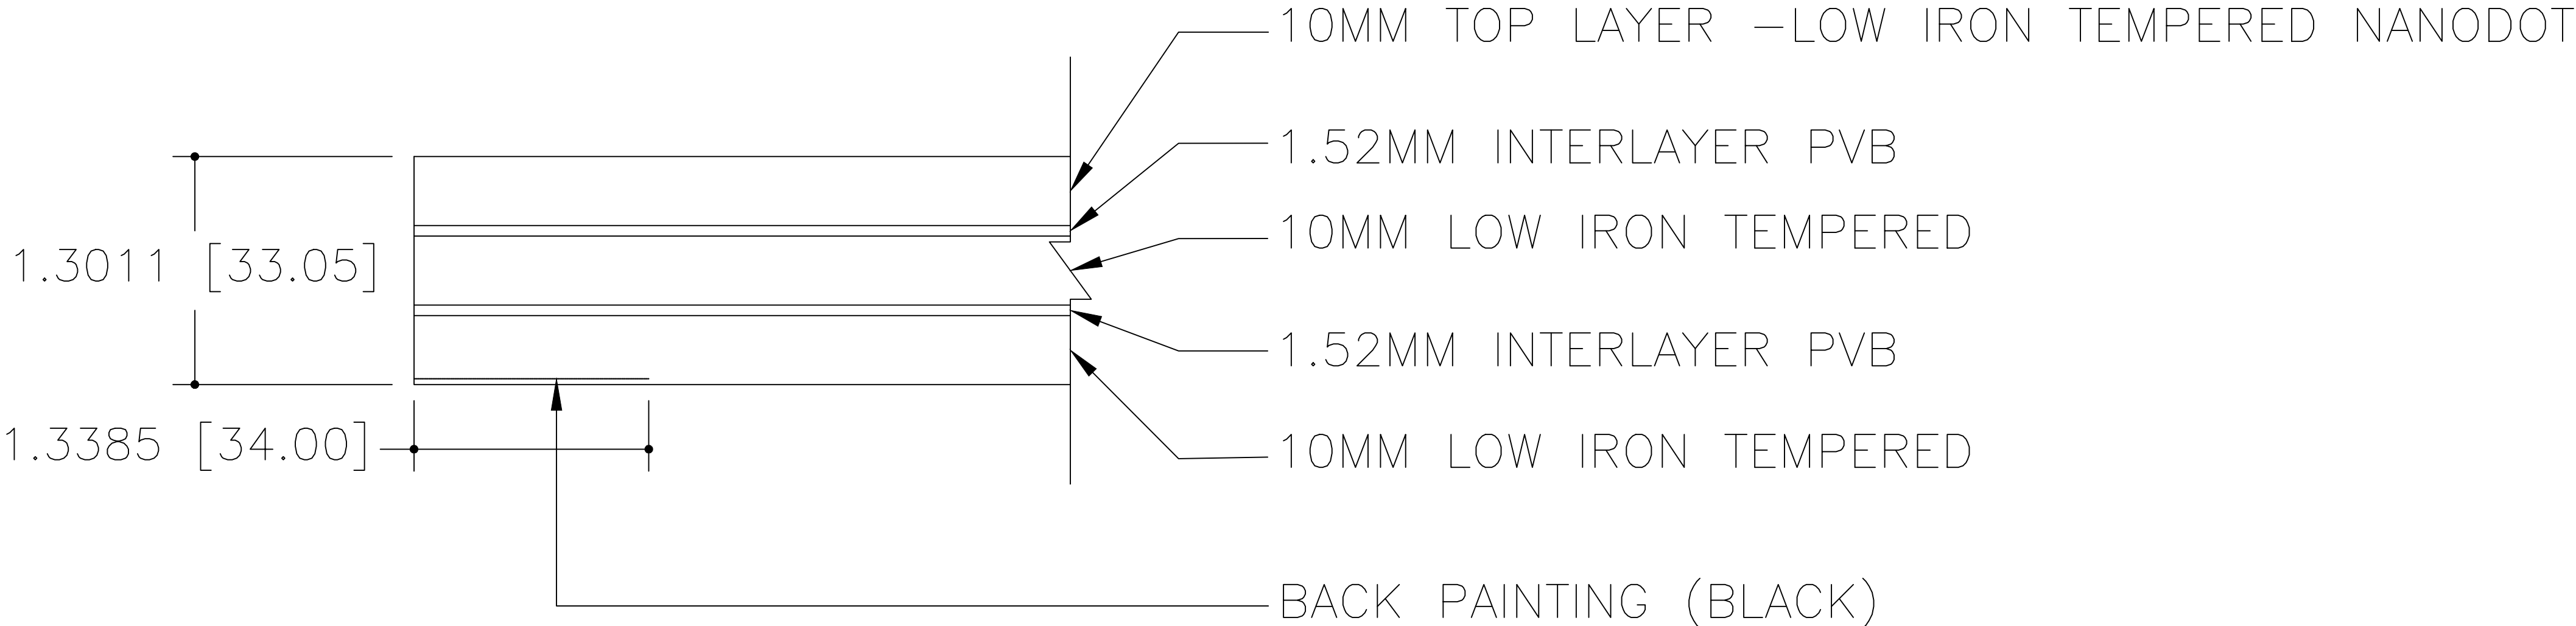

2 DETAIL - RAFTER GLASS ASSEMBLY

Scale: 1'-6"=1'-0"

Signed:

Date:

Rev. No.	Date	Description
1		
2		
3		
4		

Specifications	Frame:
----------------	--------

ARCHITECT		N/A	
CONTRACTOR		Ross Builders Co., Inc.	
MANUFACTURER		Glass Flooring Systems, Inc. 6 Aaron Way Unit 1 Sparta, NJ 07871	
PROJECT		21280 Avalon Dr Replacement Panel	
ALL ELEVATIONS ARE VIEWED FROM EXTERIOR			
DRAWN	DATE	G-102	SHEET
JH	10/27/25		3 of 3